



Version
02.00

July
2008

R&S®SMB100A Signal Generator

Data sheet



ROHDE & SCHWARZ

CONTENTS

Key features	3
Specifications.....	4
RF characteristics	4
Frequency	4
Frequency sweep	4
Reference frequency	4
Level.....	5
Level sweep	7
Spectral purity	7
List mode.....	9
Analog modulation	10
Possible modulation types.....	10
Simultaneous modulation.....	10
Amplitude modulation.....	10
Frequency modulation.....	11
Phase modulation.....	12
Pulse modulation (R&S®SMB-K22 option)	13
Input for external modulation signals.....	13
Modulation sources.....	13
Internal modulation generator	13
Pulse generator (R&S®SMB-K23 option)	14
Stereo/RDS coder (R&S®SMB-B5 option).....	14
General data	16
Remote control.....	16
Operating data	16
Ordering information	17
License information	17

Key features

Best signal quality in its class

- Low SSB phase noise of typ. -128 dBc (20 kHz carrier offset, 1 GHz carrier frequency, 1 Hz measurement bandwidth)
 - Very low SSB phase noise even at low output frequencies (because a new DDS synthesizer is used from 9 kHz to 23.4375 MHz instead of a downconverter)
 - Nonharmonics suppression of typ. -85 dBc (>10 kHz carrier offset, carrier frequency <1.5 GHz)
 - Low wideband noise of typ. -152 dBc (>10 MHz carrier offset, 1 GHz carrier frequency)
 - Harmonics of typ. -30 dBc at the maximum specified output power of +18 dBm
- ... for high measurement accuracy in a wide variety of applications

High output power as standard

- Specified output power of >+18 dBm over the wide frequency range of 1 MHz to 6 GHz
 - Typical maximum level of +25 dBm (in overrange) over the entire frequency range up to 6 GHz
- ... provides power reserve to replace external amplifiers

On-site servicing as convenient alternative

- Flexible concept allows servicing to be performed on site or by a Rohde & Schwarz service center
 - Straightforward modular instrument design with only four exchangeable modules ensures short repair times
 - Calibrated replacement modules make extensive calibration and adjustment unnecessary
 - Built-in selftest of modules supports troubleshooting
 - Verification of level accuracy and automatic level correction with a connected power sensor of the R&S®NRP-Zxx family¹
- ... ensures low cost of ownership and maximum instrument availability

All-purpose RF source

- Wide frequency range from 9 kHz to 6 GHz covers the main frequency bands for RF applications
 - Integrated frequency, level, and LF sweeps
 - All important analog modulations with AM, FM/φM, and pulse modulation supported
 - Internal LF generator provides sinewave signals up to 1 MHz as well as squarewave signals up to 20 kHz
 - Intuitive user interface with graphical display of the signal flow facilitates operation
 - Context-sensitive online help ensures efficient utilization of the instrument
- ... makes the R&S®SMB100A the ideal signal source for a wide variety of applications

Ideal for production

- Short switchover times for frequency of typ. 1.6 ms and level of typ. 1.2 ms via remote control and <1 ms in the List mode allow high throughput
 - High level accuracy and repeatability are the basis of high production yield
 - High output power of up to +25 dBm compensates level loss on the way to the DUT
 - Wearfree electronic attenuator with overvoltage protection up to 6 GHz as standard ensures long service life even in the case of heavy use in production
 - Compact design with only two height units saves rack space
 - Remote control via LAN, USB, and GPIB allows easy integration into a test system
- ... reduces production costs

Ready for aerospace and defense applications

- Optional pulse modulator offers excellent performance with an on/off ratio of typ. 90 dB and a rise/fall time of typ. 4 ns
 - Flexible pulse generator with minimum pulse width of 10 ns allows the generation of various pulse signals
 - Wide temperature range of 0 °C to +55 °C and maximum permissible operating altitude of 4600 m above sea level allow the instrument to be used even under extreme conditions
 - Low weight of only 5.3 kg for mobile applications
- ... expands the range of locations and applications for which the R&S®SMB100A can be used

¹ Available via firmware update.

Specifications

Specifications apply under the following conditions: 30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and all internal automatic adjustments performed. "Typical values" are designated with the abbreviation "typ." These values are verified during the final test but are not assured by Rohde & Schwarz. "Nominal values" are design parameters that are not assured by Rohde & Schwarz. These values are verified during product development but are not specifically tested during production.

RF characteristics

Frequency

Range	R&S®SMB-B101	9 kHz to 1.1 GHz
	R&S®SMB-B102	9 kHz to 2.2 GHz
	R&S®SMB-B103	9 kHz to 3.2 GHz
	R&S®SMB-B106	9 kHz to 6 GHz
Resolution of setting		0.001 Hz
Resolution of synthesis	f = 1 GHz	0.44 µHz
	to within $<1 \times 10^{-7}$ for f > 200 MHz or <20 Hz for f ≤ 200 MHz	
	after IEC/IEEE bus delimiter	<3 ms, typ. 1.6 ms
	in ALC state Sample & Hold	<7 ms, typ. 2.6 ms
	after trigger pulse in List mode	<1 ms, typ. 0.7 ms
Phase offset		adjustable in 0.1° steps

Frequency sweep

Operating modes	digital sweep in discrete steps	automatic, step, single sweep, external single, external step, manual or external trigger, linear or logarithmic spacing
Sweep range		full frequency range
Step width	linear	full frequency range
	logarithmic	0.01 % to 100 % per step
Dwell time	setting range	10 ms to 10 s
	resolution	0.1 ms

Reference frequency

Aging	after 30 days of uninterrupted operation with R&S®SMB-B1 option	$<1 \times 10^{-6}$ /year $<1 \times 10^{-9}$ /day, $<1 \times 10^{-7}$ /year
Temperature effect	in temperature range 0 °C to 50 °C with R&S®SMB-B1 option	$<2 \times 10^{-6}$ $<1 \times 10^{-7}$
Warm-up time	to nominal thermostat temperature (only with R&S®SMB-B1 option)	≤ 10 min
Output for internal reference signal	frequency (approx. sinewave) level source impedance	10 MHz typ. 10 dBm nominal 50 Ω
Input for external reference	frequency maximum deviation input level, recommended input impedance	10 MHz 3×10^{-6} ≥ 0 dBm, ≤ 16 dBm nominal 50 Ω

Level


The R&S®SMB100A has two different attenuator modes for level setting:

AUTO MODE: In this mode, the attenuator is switched automatically. The output level is specified over the full range from –120 dBm to +13/18 dBm.


FIXED MODE: The level is set without switching the attenuator. The attenuator is fixed to the current setting. If ALC state is ON, level changes are performed without interruption. The maximum attenuation range is limited. With higher attenuation, the spectral purity of the output signal decreases.

Setting range		–145 dBm to +30 dBm
Specified level range	1 MHz < f ≤ 6 GHz	–120 dBm to +18 dBm (PEP) ²
	200 kHz < f ≤ 1 MHz	–120 dBm to +13 dBm (PEP)
Resolution		0.01 dB
Absolute level uncertainty	ALC state ON, AUTO mode temperature range 18 °C to 33 °C	
	200 kHz < f ≤ 3 GHz	<0.5 dB
	f > 3 GHz	<0.9 dB
Additional level uncertainty	ALC state Sample & Hold This mode is only needed in case of pulse modulation.	<0.5 dB
Output impedance VSWR in 50 Ω system	200 kHz ≤ f ≤ 6 GHz	<1.8
Setting time	after IEC/IEEE bus delimiter, with GUI update stopped, AUTO mode, temperature range 18 °C to 33 °C, to <0.1 dB deviation from final value	
	ALC state ON	<2.5 ms, typ. 1.2 ms
	ALC state Sample & Hold	<7 ms, typ. 2.2 ms
	in List mode after trigger pulse	<1 ms, typ. 0.6 ms
Uninterrupted level setting	FIXED mode, ALC state ON setting range	>20 dB
Reverse power (from ≥50 Ω source)	maximum permissible RF power in output frequency range of RF path for f > 1 MHz	
	1 MHz < f ≤ 1 GHz	50 W
	1 GHz < f ≤ 2 GHz	25 W
	2 GHz < f ≤ 6 GHz	10 W
	maximum permissible DC voltage	50 V

² PEP = peak envelope power.

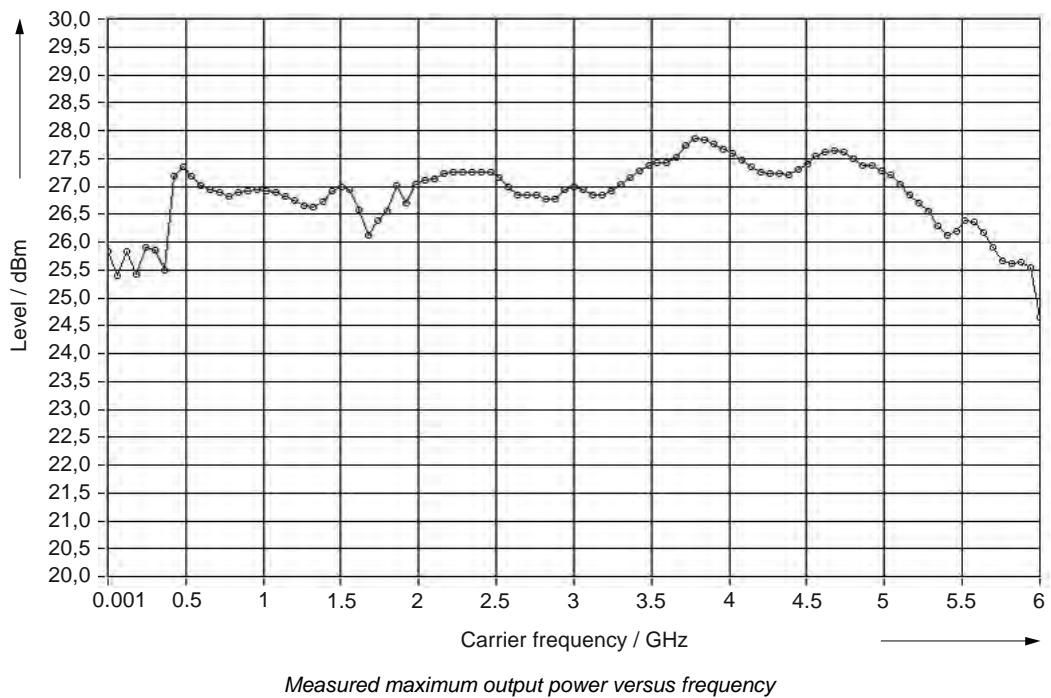

Measured maximum output power versus frequency

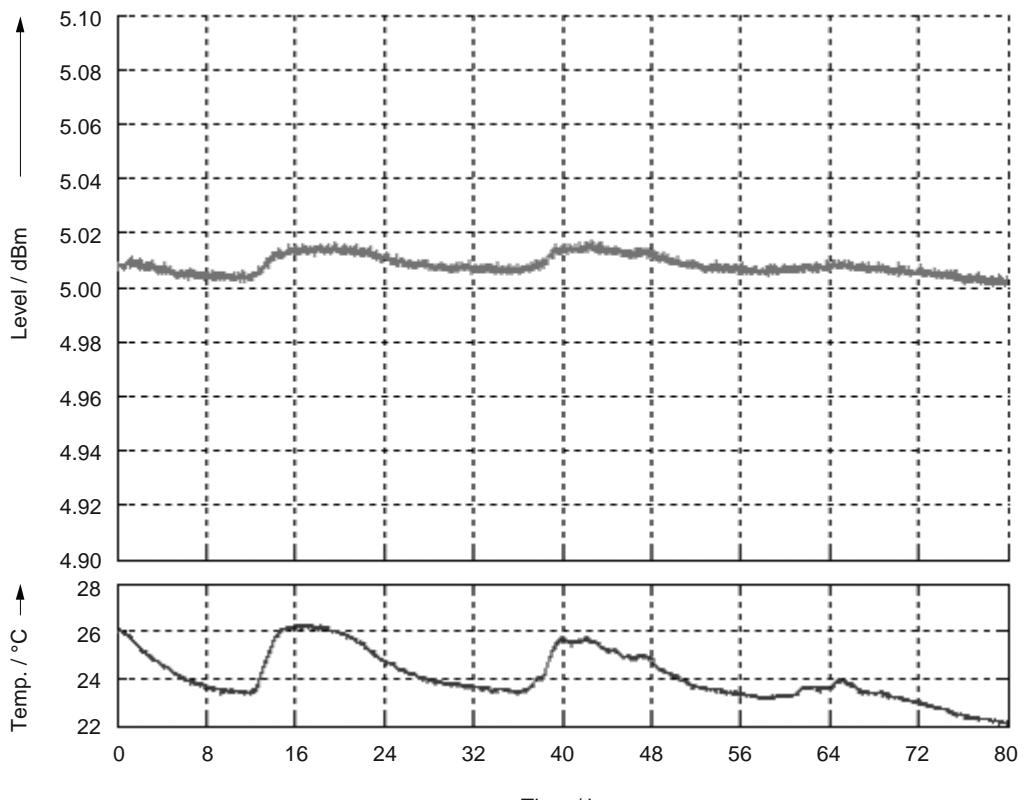


Measured level repeatability at 3 GHz, 5 dBm, ALC ON

Level sweep


Operating modes	digital sweep in discrete steps	automatic, step, single sweep, external single, external step, manual or external trigger, linear spacing
Sweep range	uninterrupted	full level range 0.1 dB to 20 dB
Step width		0.1 dB to 20 dB
Dwell time	setting range resolution	10 ms to 10 s 0.1 ms

Spectral purity


Harmonics	f > 1 MHz; CW level ≤ 13 dBm	<-30 dBc
Nonharmonics	CW, level >-10 dBm, >10 kHz carrier offset	
	f ≤ 1500 MHz	<-70 dBc (typ. <-85 dBc)
	1500 MHz < f ≤ 3 GHz	<-64 dBc (typ. <-79 dBc)
Wideband noise	f > 3 GHz	<-58 dBc (typ. <-73 dBc)
	attenuator mode AUTO for level > 5 dBm, >10 MHz carrier offset, 1 Hz measurement bandwidth, CW	
		<-142 dBc (typ. -152 dBc)
SSB phase noise	20 kHz carrier offset, 1 Hz measurement bandwidth, CW	
	f = 100 MHz	<-141 dBc (typ. -147 dBc)
	f = 1 GHz	<-122 dBc (typ. -128 dBc)
	f = 2 GHz	<-116 dBc (typ. -122 dBc)
	f = 3 GHz	<-112 dBc (typ. -118 dBc)
	f = 4 GHz	<-110 dBc (typ. -116 dBc)
RMS jitter	f = 6 GHz	<-106 dBc (typ. -112 dBc)
	carrier frequency (Cf) = 1 GHz, BW = 1 Hz to 10 MHz, with R&S®SMB-B1 option	nominal 1.1 ps (1.1 mUI)
	Cf = 1 GHz, BW = 1 Hz to 10 MHz	nominal 3.9 ps (3.9 mUI)
	Cf = 155 MHz, BW = 100 Hz to 1.5 MHz	nominal 83 fs (12.9 µUI)
	Cf = 622 MHz, BW = 1 kHz to 5 MHz	nominal 63 fs (39.2 µUI)
Residual FM	Cf = 2.488 GHz, BW = 5 kHz to 15 MHz	nominal 55 fs (137 µUI)
	RMS value at f = 1 GHz	
	0.3 kHz to 3 kHz, weighted (ITU-T)	<4 Hz
Residual AM	0.03 kHz to 23 kHz	<10 Hz
	RMS value (0.03 kHz to 20 kHz)	<0.02 %

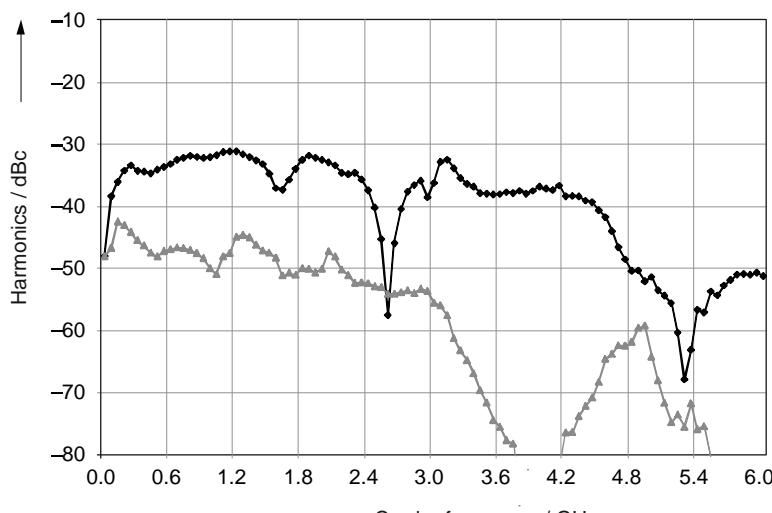


Measured harmonics at +18 dBm versus frequency

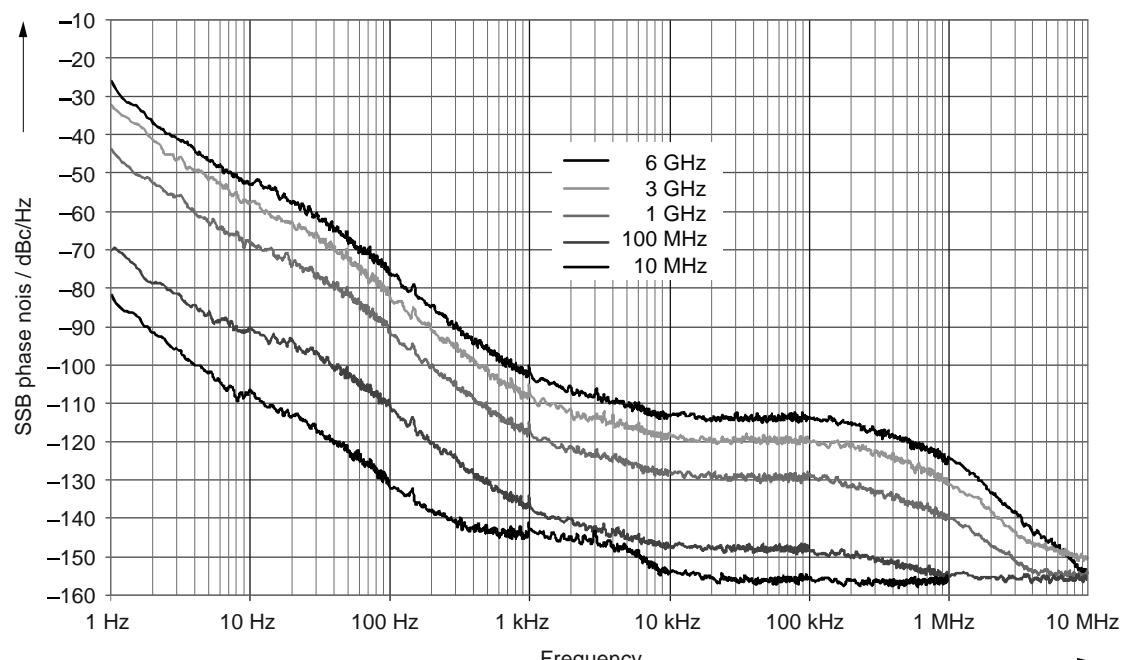

Measured SSB phase noise with internal OCXO (R&S®SMB-B1 option)

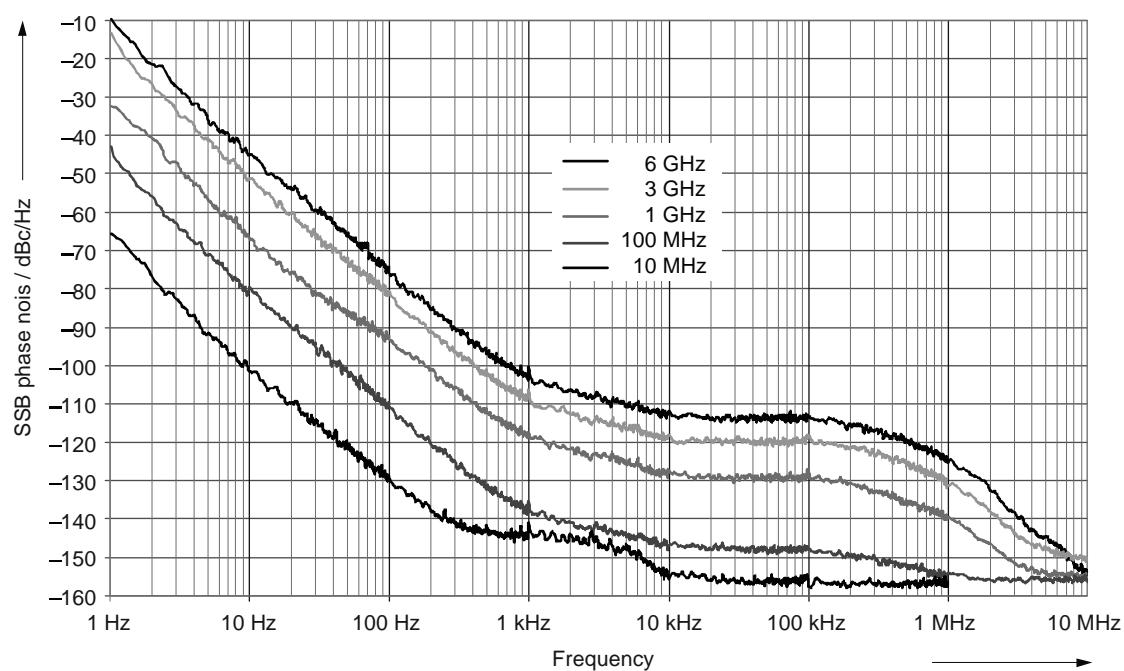

Measured SSB phase noise

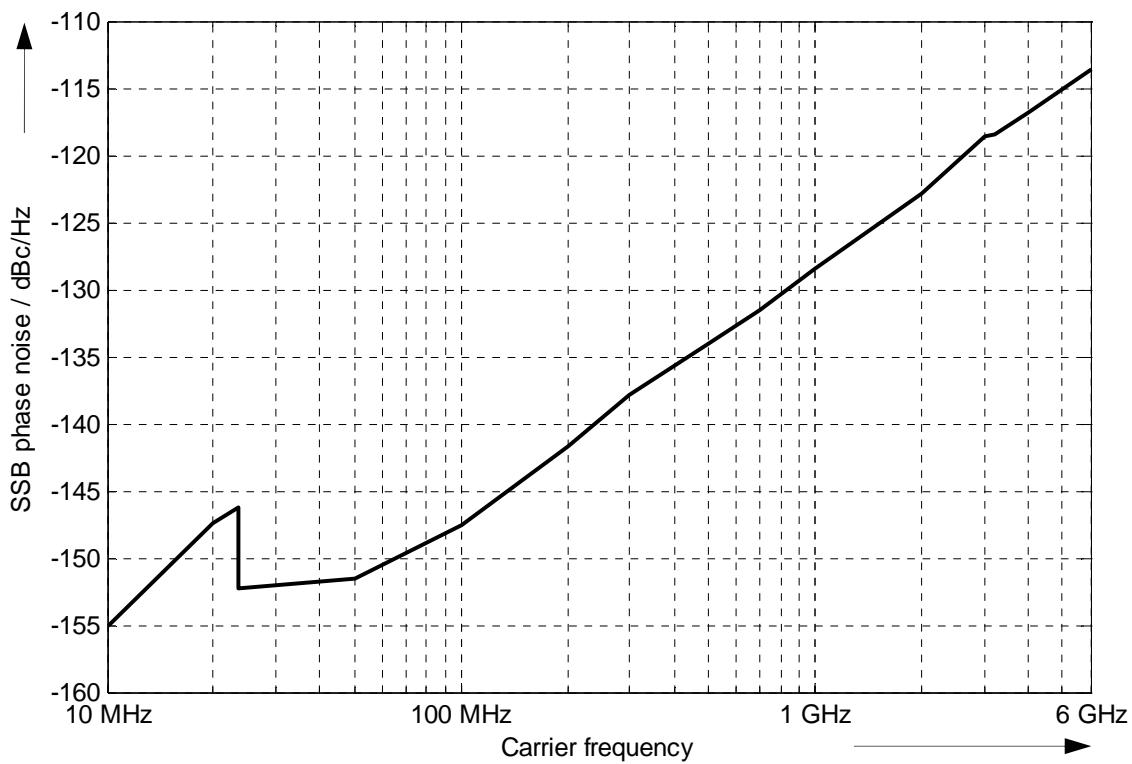

Measured SSB phase noise at 20 kHz offset versus frequency with internal OCXO (R&S®SMB-B1 option)

List mode

Frequency and level values can be stored in a list and set in an extremely short amount of time.		
Operating modes		automatic, single sweep, manual or external trigger
Max. number of stored settings		2000
Dwell time		1 ms to 1 s
Resolution		0.1 ms
Setting time	after external trigger	see frequency and level data

Analog modulation

Possible modulation types

Amplitude modulation, frequency modulation, phase modulation, pulse modulation.

Simultaneous modulation

	Amplitude modulation	Frequency modulation	Phase modulation	Pulse modulation
Amplitude modulation		+	+	(+)
Frequency modulation	+		-	+
Phase modulation	+	-		+
Pulse modulation	(+)	+	+	

+ = compatible, - = incompatible, (+) = compatible with reduced AM modulation performance


Amplitude modulation

For $f \geq 100$ kHz, attenuator mode AUTO, level (PEP) within specified level range.

Operating modes		internal, external, internal + external, AC/DC
Modulation depth	At high levels, modulation is clipped when the maximum PEP is reached.	0 % to 100 %
Resolution		0.1 %
AM depth error	$f_{mod} = 1$ kHz and $m < 80$ % $f \leq 23.4375$ MHz $f > 23.4375$ MHz	<(1 % of setting + 1 %) <(4 % of setting + 1 %)
AM distortion	$f_{mod} = 1$ kHz, $f \leq 23.4375$ MHz $m = 30$ % $m = 80$ % $f_{mod} = 1$ kHz, $f > 23.4375$ MHz $m = 30$ % $m = 80$ %	<0.25 % <0.5 % <1.5 % <3 %
Modulation frequency response	$m = 60$ %, up to 50 kHz	<3 dB
Synchronous φM at AM	$m = 30$ %, $f_{mod} = 1$ kHz, ±peak/2	<0.2 rad

Frequency modulation


FM multiplier for different frequency ranges	$f \leq 23.4375 \text{ MHz}$ $23.4375 \text{ MHz} < f \leq 46.875 \text{ MHz}$ $46.875 \text{ MHz} < f \leq 93.75 \text{ MHz}$ $93.75 \text{ MHz} < f \leq 187.5 \text{ MHz}$ $187.5 \text{ MHz} < f \leq 375 \text{ MHz}$ $375 \text{ MHz} < f \leq 750 \text{ MHz}$ $750 \text{ MHz} < f \leq 1500 \text{ MHz}$ $1500 \text{ MHz} < f \leq 3 \text{ GHz}$ $f > 3 \text{ GHz}$	$rm = \frac{1}{4}$ $rm = \frac{1}{32}$ $rm = \frac{1}{16}$ $rm = \frac{1}{8}$ $rm = \frac{1}{4}$ $rm = \frac{1}{2}$ $rm = 1$ $rm = 2$ $rm = 4$
Operating modes		internal, external, internal + external, AC/DC FM mode Low Noise FM mode Normal FM mode High Deviation
Maximum deviation	$f \leq 23.4375 \text{ MHz}$ $f > 23.4375 \text{ MHz}$ FM mode Normal FM mode Low Noise FM mode High Deviation	1 MHz $rm \times 2 \text{ MHz}$ $rm \times 1 \text{ MHz}$ $rm \times 4 \text{ MHz}$
Resolution		<0.02 % of set deviation min. $rm \times 0.1 \text{ Hz}$
FM deviation error	$f_{\text{mod}} = 1 \text{ kHz}$, deviation $\leq rm \times 1 \text{ MHz}$ internal external	<(2 % of setting + 20 Hz) <(3 % of setting + 20 Hz)
FM distortion	$f_{\text{mod}} = 2 \text{ kHz}$, deviation = $rm \times 1 \text{ MHz}$	<0.2 %
Modulation frequency response	FM modes Low Noise and High Deviation DC/10 Hz to 100 kHz FM mode Normal DC/10 Hz to 500 kHz	<3 dB <3 dB
Synchronous AM with FM	40 kHz deviation, $f_{\text{mod}} = 1 \text{ kHz}$, $f > 10 \text{ MHz}$	<0.2 %
Carrier frequency offset with FM DC	after FM offset calibration	<0.2 % of set deviation

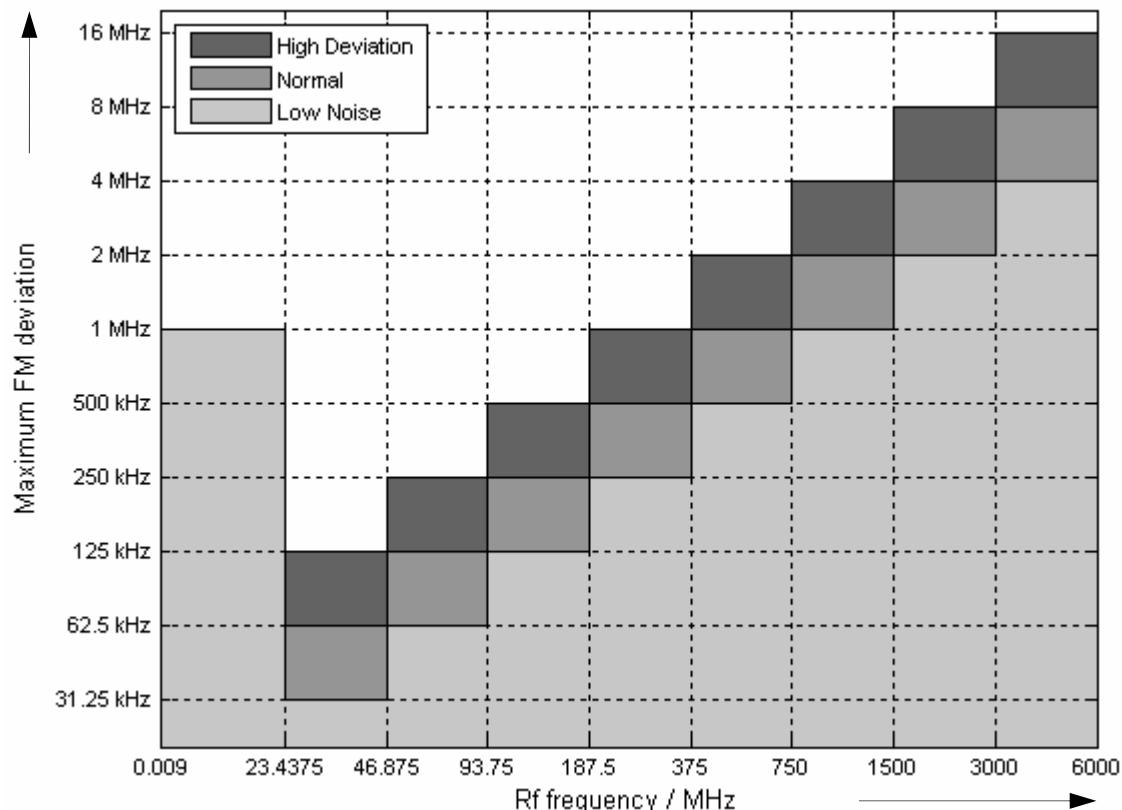

FM deviation versus frequency and operating mode

Phase modulation

φM multiplier for different frequency ranges	$f \leq 23.4375 \text{ MHz}$	$rm = \frac{1}{4}$
	$23.4375 \text{ MHz} < f \leq 46.875 \text{ MHz}$	$rm = 1/32$
	$46.875 \text{ MHz} < f \leq 93.75 \text{ MHz}$	$rm = 1/16$
	$93.75 \text{ MHz} < f \leq 187.5 \text{ MHz}$	$rm = 1/8$
	$187.5 \text{ MHz} < f \leq 375 \text{ MHz}$	$rm = \frac{1}{4}$
	$375 \text{ MHz} < f \leq 750 \text{ MHz}$	$rm = \frac{1}{2}$
	$750 \text{ MHz} < f \leq 1500 \text{ MHz}$	$rm = 1$
	$1500 \text{ MHz} < f \leq 3 \text{ GHz}$	$rm = 2$
	$f > 3 \text{ GHz}$	$rm = 4$
Operating modes		internal, external, internal + external, AC/DC φM mode Low Noise φM mode Normal φM mode High Deviation
Maximum deviation	$f \leq 23.4375 \text{ MHz}$	2 rad
	$f > 23.4375 \text{ MHz}$	
	φM mode Normal	$rm \times 4 \text{ rad}$
	φM mode Low Noise	$rm \times 10 \text{ rad}$
Resolution	φM mode High Deviation	$rm \times 40 \text{ rad}$
		<0.02 % of set deviation, min. $rm \times 20 \mu\text{rad}$
φM deviation error	$f_{\text{mod}} = 1 \text{ kHz}$, deviation ≤ half of max. deviation	
	internal	<(2 % of setting + 0.003 rad)
	external	<(3 % of setting + 0.003 rad)
Distortion	$f_{\text{mod}} = 10 \text{ kHz}$, half of max. deviation	<0.2 %
Modulation frequency response	φM modes Low Noise and High Deviation	
	DC/10 Hz to 100 kHz	<3 dB
	φM mode Normal	
	DC/10 Hz to 500 kHz	<3 dB

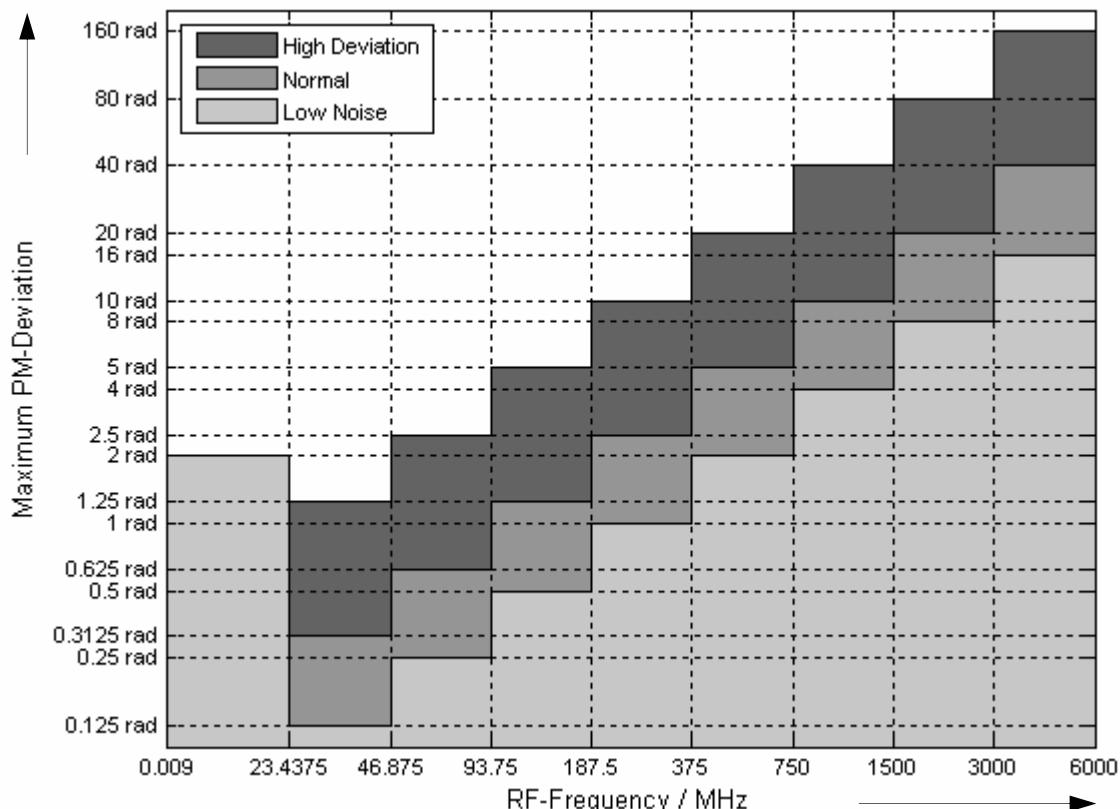

φM deviation versus frequency and operating mode

Pulse modulation (R&S®SMB-K22 option)

When pulse modulation is activated, the ALC state of the R&S®SMB100A is automatically changed to ALC OFF (Sample & Hold). In this state, the ALC loop is opened and the output level is set directly. In order to set the correct output level, a sample & hold measurement is performed after each frequency or level setting.

Operating modes	external, internal	
On/off ratio	>80 dB	
Rise/fall time	10 % to 90 % of RF amplitude $f > 23.4375 \text{ MHz}$	<20 ns, typ. 4 ns
Pulse repetition frequency		0 Hz to 2.5 MHz
Video crosstalk	spectral line of fundamental of 100 kHz squarewave modulation	<-30 dBc

Input for external modulation signals

Modulation input EXT for AM/FM/ φ M	nominal input impedance	>100 k Ω
	input sensitivity (peak value for set modulation depth or deviation)	nominal 1 V
	maximum permissible input voltage	± 10 V
Modulation input PULSE	nominal input level	
	low threshold	0.5 V
	high threshold	1.5 V
	maximum permissible input voltage	± 5 V
	nominal input impedance	>5 k Ω or 50 Ω
	polarity	selectable

Modulation sources

Internal modulation generator

Waveforms	sine, square	
Frequency range	sine	0.1 Hz to 1 MHz
	square	0.1 Hz to 20 kHz
Resolution of setting		0.1 Hz
Frequency error		<(0.005 Hz + relative error of reference frequency \times modulation frequency)
Frequency response	sine	
	0.1 Hz to 1 MHz	<1 dB
Distortion	sine	
	$f < 100 \text{ kHz}$ at $R_L > 200 \Omega$, level (V_{EMF}) < 1 V	<0.1 %
Output voltage	V_p at LF connector, open circuit voltage	
	EMF	1 mV to 3 V
	resolution	1 mV
Output impedance	setting error at 1 kHz	<(1 % of setting + 1 mV)
		nominal 10 Ω
Frequency setting time	to within $<1 \times 10^{-7}$, after IEC/IEEE bus delimiter	<5 ms
Sweep	digital sweep in discrete steps	
	operating modes	automatic, step, single sweep external single, external step manual or external trigger linear or logarithmic spacing
	sweep range	full frequency range
	step width (lin)	full frequency range
	step width (log)	0.01 % to 100 % per step

Pulse generator (R&S®SMB-K23 option)

Pulse generator is implemented fully digital; the clock is directly derived from the instruments reference frequency.

Operating modes		automatic, external trigger, external gate single pulse, double pulse, delayed pulse (external trigger)
Active trigger edge		positive or negative
Pulse period settings	range resolution	40 ns to 85 s 10 ns
Pulse width settings	The pulse width of double pulses can be set independently. range resolution	10 ns to 1 s 10 ns
Pulse delay settings	range resolution	10 ns to 1 s 10 ns
Double-pulse spacing settings	range resolution	20 ns to 1 s 10 ns
External trigger	delay jitter of delay	nominal 50 ns <10 ns
PULSE/VIDEO output		LVTTL signal ($RL \geq 50 \Omega$)

Stereo/RDS coder (R&S®SMB-B5 option)

The specifications apply to RF frequencies in the range 66 MHz to 110 MHz.

Stereo modes	internal with modulation generator external analog(via L and R inputs) or external digital (via S/P DIF input)	L, R, R = L, R = -L L, R, R = L, R = -L, R ≠ L internal generation of ARI/RDS signals in 5 user-selectable RDS data sets, simultaneous generation of MPX, ARI and RDS signals possible
MPX	frequency deviation resolution	0 Hz to 80 kHz 10 Hz
L, R signal	AF frequency range AF frequency response (referenced to 500 Hz) AF = 20 Hz to 40 Hz AF = 40 Hz to 15 kHz	20 Hz to 15 kHz
Stereo crosstalk attenuation	AF = 1 kHz	>50 dB
Distortion	67.5 kHz MPX frequency deviation AF = 1 kHz	<0.1 %, typ. 0.05 %
S/N ratio	stereo/ RDS signal Generator without preemphasis, receiver with deemphasis. ITU-R weighted (quasi-peak) ITU-R unweighted (rms) A-weighted (rms)	
Preemphasis		off, 50 µs, 75 µs
Pilot tone	frequency deviation resolution phase (relative to 38 kHz phase) resolution	19 kHz ±2 Hz 0 Hz to 10 kHz 10 Hz 0° to ±5° 0.1°
ARI/RDS subcarrier frequency		57 kHz ±6 Hz
ARI frequency deviation		0 Hz to 10 kHz
RDS frequency deviation	resolution	10 Hz 0 Hz to 10 kHz
ARI identification	selection of traffic announcement identification (DK) or area identification (BK)	OFF, DK, BK, DK + BK
ARI BK	selection of standardized area identification	A – F

RDS	traffic program	off/on
	traffic announcement	off/on
	data set	1 to 5
	maximum data length	64 kbyte
Analog modulation inputs L, R	input impedance	600 Ω, nominal or 100 kΩ, nominal
	input voltage for selected deviation	1 V, nominal
Digital modulation input S/P DIF	input impedance	75 Ω
	input voltage V_{pp}	1 V (400 mV to 5 V)

General data

Remote control

Systems		IEC/IEEE bus, IEC 60625 (IEEE 488) Ethernet (TC/IP) USB
Command set		SCPI 1999.5
Connector	IEC Ethernet USB	24-contact Amphenol Western USB slave
IEC/IEEE bus address		0 to 30
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0
LAN interface		10/100BaseT

Operating data

Power supply	input voltage range, AC, nominal	100 V to 240 V (AC) $\pm 10\%$
	AC supply frequency	50 Hz to 60 Hz, $-5\% +10\%$
	Max. input current	1.4 A (100 V) – 0.6 A (240 V)
Power factor correction		in line with EN 61000-3-2
EMC		in line with EN 55011 class B, EN 61326
Immunity to interfering field strength		up to 10 V/m
Environmental conditions	operating temperature range	0 °C to 55 °C in line with EN 60068-2-1, EN 60068-2-2
	storage temperature range	-40 °C to +71 °C
	climatic resistance, +40 °C/95 % rel. humidity	in line with EN 60068-2-78
	operating altitude	up to 4600 m
Mechanical resistance	vibration, sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz, max. 0.5 g at 55 Hz to 150 Hz, in line with EN 60068-2-6
	vibration, random	10 Hz to 300 Hz, acceleration 1.2 g (rms) in line with EN 60068-2-64
	shock	40 g shock spectrum in line with EN 60068-2-27, MIL-STD-810E
Electrical safety		in line with IEC 61010-1, EN 61010-1, CAN/CSA-C22.2 No. 61010-1-04, UL 61010-1
Approvals		VDE-GS, _c CSA _{us}
Dimensions (W × H × D)		344 mm × 112 mm × 368 mm (13.54 in × 4.41 in × 14.49 in)
Weight	when fully equipped	5.3 kg (11.7 lb)
Recommended calibration interval		3 years

Ordering information

Designation	Type	Order No.
Base unit		
Signal Generator ³ Including power cable, Quick Start Guide, and CD-ROM (with operating and service manual)	R&S®SMB100A	1406.6000.02
Options		
RF Path		
9 kHz to 1.1 GHz	R&S®SMB-B101	1407.2509.02
9 kHz to 2.2 GHz	R&S®SMB-B102	1407.2609.02
9 kHz to 3.2 GHz	R&S®SMB-B103	1407.2709.02
9 kHz to 6 GHz	R&S®SMB-B106	1407.2909.02
Reference Oscillator OCXO	R&S®SMB-B1	1407.3005.02
Stereo/RDS Coder	R&S®SMB-B5	1407.3205.02
Pulse Modulator	R&S®SMB-K22	1407.3770.02
Pulse Generator	R&S®SMB-K23	1407.3786.02
Service options		
Two-Year Calibration Service	R&S®CO2SMB100A	please contact your local sales office
Three-Year Calibration Service	R&S®CO3SMB100A	
Five-Year Calibration Service	R&S®CO5SMB100A	
One-Year Repair Service following the warranty period	R&S®RO2SMB100A	
Two-Year Repair Service following the warranty period	R&S®RO3SMB100A	
Four-Year Repair Service following the warranty period	R&S®RO5SMB100A	
Documentation of Calibration Values	R&S®DCV-2	0240.2193.18
DKD (ISO 17025) Calibration including ISO 9000 calibration (can only be ordered with the device)	R&S®SMB-DKD	1161.3607.02
Recommended extras		
Hardcopy manuals (in English, UK)		1407.0806.32
Hardcopy manuals (in English, US)		1407.0806.39
19" Rack Adapter	R&S®ZZA-S234	1109.4493.00
Power Sensor 9 kHz to 6 GHz	R&S®NRP-Z92	1171.7005.42
Keyboard with USB Interface (US character set)	R&S®PSL-Z2	1157.6870.04
Mouse with USB Interface, optical	R&S®PSL-Z10	1157.7060.03

License information

The firmware of this device contains open source software. Details as well as license agreements can be found in release notes and operating manual.

³ The base unit must be ordered together with an R&S®SMB-B101/R&S®SMB-B102/R&S®SMB-B103/R&S®SMB-B106 frequency option.



For product brochure, see PD 5213.8396.12
and www.rohde-schwarz.com
(search term: SMB100A)



www.rohde-schwarz.com

Europe: +49 1805 12 4242, customersupport@rohde-schwarz.com
USA and Canada: +1-888-837-8772, customer.support@rsa.rohde-schwarz.com
Asia: +65 65130488, customersupport.asia@rohde-schwarz.com