


UXA X-Series Signal Analyzer, Multi-touch N9040B

This UXA configuration guide will help you determine which performance options, measurement applications, accessories, and services to include with your new UXA or to add as upgrades to an existing UXA.

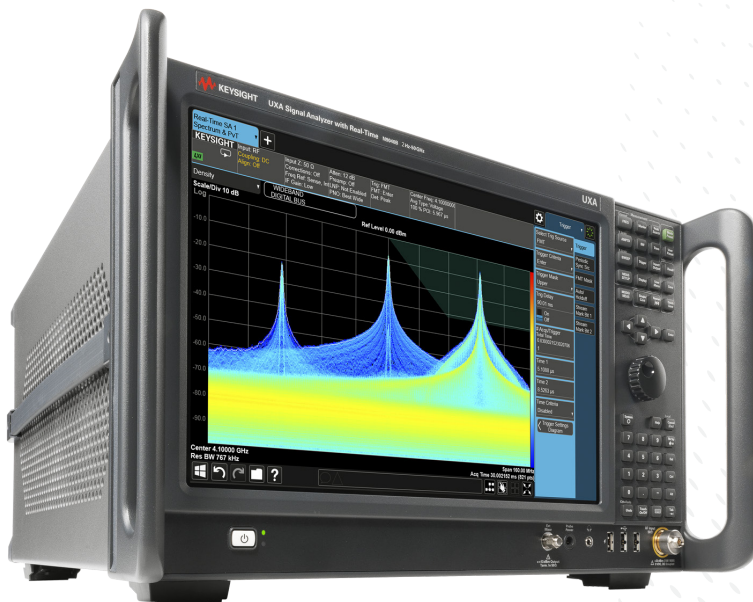

What Is Included In the Base Product

The “standard” options and accessories come with the UXA base instrument at no additional charge and do not need to be ordered. They include:

- Spectrum analyzer software application
- Getting Started Guide
- UXA start-up assistance
- Enhanced phase noise
- Fast sweep capability
- 25 MHz IF analysis bandwidth
- 1 GHz bandwidth auxiliary IF output
- Enhanced display package
- External mixing for frequency coverage extension up to 1.1 THz
- Microwave preselector bypass for frequencies above 3.6 GHz
- Low noise path for improved sensitivity above 3.6 GHz
- Low frequency enabled
- Fine step mechanical attenuator
- Digital processor with 2 GB capture memory
- LO/IM nulling
- Noise Floor Extension; instrument alignment
- Precision frequency reference
- Real-time data link for real-time IQ data streaming up to 40 MHz
- Quad-core, high-performance processor, 16 GB RAM, and SD memory card
- Removable solid-state drive
- Microsoft Windows 10 operating system
- Multi-language user interface
- Country-specific power cord
- Front and rear panel covers for protection during transit

Get More Information

For a summary of specifications, refer to the N9040B data sheet (literature number 5992-0090EN).

A full set of specifications is available in the N9040B UXA Signal Analyzer Specification Guide at www.keysight.com/find/uxa_specifications.

Configure Your Keysight UXA Signal Analyzer

This step-by-step process will help you configure your UXA signal analyzer. Tailor the performance to meet your requirements.

For a summary of specifications, refer to the UXA signal analyzer data sheet (5992-0090EN).

Step 1. Select maximum frequency range (required option)

Description	Option number	Additional information
Frequency range, 2 Hz to 8.4 GHz	N9040B-508	
Frequency range, 2 Hz to 13.6 GHz	N9040B-513	
Frequency range, 2 Hz to 26.5 GHz	N9040B-526	
Frequency range, 2 Hz to 44 GHz	N9040B-544	
Frequency range, 2 Hz to 50 GHz	N9040B-550	

Step 2. Add a preamplifier

Description	Option number	Additional information
Preamplifier, 100 kHz to 8.4 GHz	N9040B-P08	Compatible with frequency range options: N9040B-508, N9040B-513, and N9040B-526, N9040B-544 and N9040B-550
Preamplifier, 100 kHz to 13.6 GHz	N9040B-P13	Compatible with frequency range options: N9040B-513, N9040B-526, N9040B-544 and N9040B-550
Preamplifier, 100 kHz to 26.5 GHz	N9040B-P26	Compatible with frequency range options: N9040B-526, N9040B-544 and N9040B-550
Preamplifier, 100 kHz to 44 GHz	N9040B-P44	Compatible with frequency range option: N9040B-544
Preamplifier, 100 kHz to 50 GHz	N9040B-P50	Compatible with frequency range option: N9040B-550

Step 3. Choose an attenuator

Description	Option number	Additional information
Mechanical attenuator	Standard	2 dB steps, 0 to 70 dB; licensed as N9040B-FSA
Electronic attenuator up to 3.6 GHz	N9040B-EA3	Add in addition to the mechanical attenuator; 1 dB steps, 0 to 24 dB

Step 4. Choose analysis bandwidth

Description	Option number	Additional information
25 MHz analysis bandwidth	Standard	Licensed as N9040B-B25
40 MHz analysis bandwidth	N9040B-B40	Extends the analysis bandwidth to 40 MHz
255 MHz analysis bandwidth	N9040B-B2X	Extends the analysis bandwidth to 255 MHz
510 MHz analysis bandwidth	N9040B-B5X	Extends the analysis bandwidth to 510 MHz
1 GHz analysis bandwidth	N9040B-H1G	Extends the analysis bandwidth to 1 GHz; compatible with frequency range option N9040B-550
Microwave preselector bypass	Standard	Bypass the microwave preselector for wider bandwidth IF; licensed as N9040B-MPB

Step 5. Choose performance options

Description	Option number	Additional information
Digital processor with 2 GB capture memory	Standard	Licensed as N9040B-DP2
Digital processor with 4 GB capture memory	Standard	Standard in instruments with serial number prefixes \geq MY/SG/US5608, when Option B2X, B5X, or H1G is installed. Licensed as N9040B-DP4.
Enhanced phase noise performance	Standard	DDS-based LO assembly; licensed as N9040B-EPO
External mixing	Standard	Provides external mixing with Keysight and third party mixers; single port ¹ for LO out and IF in (SMA female); licensed as N9040B-EXM
Fast sweep capability	Standard	Improves sweep speed in swept-tune mode; licensed as N9040B-FS1 and N9040B-FS2
LO/IM nulling	Standard	Minimizes the LO feed-thru and the intermodulation distortion; licensed as N9040B-NUL
Low noise path	Standard	Improves sensitivity (DANL) in frequency bands above 3.6 GHz without degrading dynamic range; licensed as N9040B-LNP
Full bypass path	Standard	Bypass the microwave preselector and enable the low noise path above 3.6 GHz. Standard in instruments when Option H1G is installed; compatible with frequency range option N9040B-550; licensed as N9040B-FBP
Noise floor extension	Standard	Improves displayed average noise level (DANL), instrument alignment based implementation; licensed as N9040B-NF2
Precision frequency reference	Standard	Aging rate: $\pm 1 \times 10^{-7}$ /year; licensed as N9040B-PFR
APC 3.5 mm connector	N9040B-C35	3.5 mm RF input connector on 26.5 GHz UXA (Compatible with Option 526 only)

1. When used with Keysight 11970 Series external mixers, an external diplexer is required. Recommended diplexer can be purchased from Keysight as N9029AE13, or from OML Inc. as DPL313B.

Step 6. Add real-time spectrum analysis

Note: Keysight offers 4 license types for the measurement applications and instrument features, in 2 license terms: Perpetual or Time-based.

License types:

- **Node-locked:** Allows you to use the license on one instrument/computer at a time
- **Transportable:** Allows you to use the license on one instrument/computer at a time. This license may be transferred to another instrument/computer using Keysight's online tool
- **Floating:** Allows you to access the license on the networked instruments/computers from a server, one at a time. For concurrent access, multiple licenses may be purchased
- **USB Portable:** Allows you to access the license from one instrument/computer to another by end-user only with certified USB dongle, purchased separately

License terms:

- **Perpetual:** License can be used in perpetuity. For perpetual license holders, a separate support contract is required to access Keysight technical support and software updates
- **Time-based:** License is time limited to a defined period, such as 12-months. A valid support contract is included in the pricing for time-based licenses.

Description	Model number	Additional information
Real-time analysis, basic detection	N9040RT1B	Includes frequency mask trigger (FMT), time qualified trigger (TQT); minimum 17.3 μ s signal duration for 100% probability of intercept (POI) with full amplitude accuracy; requires N9040B-B2X or N9040B-H1G (255 MHz max real-time BW), or N9040B-B5X (510 MHz max real-time BW)
Real-time analysis up to 160 MHz BW, optimum detection	N9040RT2B	Includes FMT, TQT triggers; minimum 3.517 μ s signal duration for 100% probability of intercept (POI) with full amplitude accuracy; requires N9040B-B2X or N9040B-H1G (255 MHz max real-time BW), or N9040B-B5X (510 MHz max real-time BW)

Step 6. Add real-time spectrum analysis (continued)

Description	Model number	Additional information
Frequency mask trigger, basic detection	N90EMFT1B	Enables frequency mask triggering with N9067C pulse application and 89600 VSA software to detect signals as short as 15 μ s duration; included in N9040B-RT1; requires N9040B-B2X, N9040B-B5X, or N9040B-H1G.
Frequency mask trigger, optimum detection	N90EMFT2B	Enables frequency mask triggering with N9067C pulse application and 89600 VSA software to detect signals as short as 3.6 μ s duration; included in N9040B-RT2; requires N9040B-B2X, N9040B-B5X, or N9040B-H1G.
Duplex IF RTSA	N90EMDUAB	Enables control of 2x255 MHz DIF for optimized frequency and time domain analysis in RTSA mode; Requires option B5X and RT1(N9040RT1B) or RT2(N9040RT2B)
Real-time I/Q data streaming	N9040B-RTS	Stream gap-free 16 bit I/Q data up to 255 MHz bandwidth for offline analysis. High speed LVDS connector allows connection to third-party X-COM Systems data recorder IQC5255B. Requires option RT1(N9040RT1B) or RT2 (N9040RT2B)
Real-time spectrum recorder and analyzer application	N9040B-RTR	Enables recording, analyzing and playback of spectrum density data over time for detecting and analyzing signal anomalies. Requires Option RT1 (N9040RT1B) or RT2 (N9040RT2B)

Step 7. Add optional instrument features including security

Description	Model number	Additional information
Enhanced display package	Standard	Includes spectrogram, trace zoom, and zone span in SA mode; Licensed as N90E1EDPB
Basic EMI precompliance	N90EMEMCB	Perform basic EMI precompliance measurements with CISPR 16-1-1 detectors and bandwidths; tune and listen, and measure at marker are also available
Time domain scan	N90EMTDSB	Improves scan speed for EMC pre-compliance tests; requires N6141EMOE EMC pre-compliance measurement application
External source control	N90EMESCB	External source control for Keysight EXG, MXG, and PSG signal generators; supports external mixing; includes 3 BNC cables and 1 cross-over LAN cable
Fast power	N90EMFP2B	Accelerates power measurements such as ACPR; requires Option B40, B85, B1A, or B1X
Resolution bandwidth extended	N90EMRBEB	Extends the maximum RBW in Zero Span; requires option B2X, B5X, or H1G
Additional removable solid-state drive (SSD)	N9040B-SS1	Provides a fully-imaged, removable SSD in addition to the one installed in instruments, with Windows 10 operating system
Security features, exclude launch programs	N9040B-SF1	Prevents the launching of Windows programs from the instrument application
Security features, prohibit saving results	N9040B-SF2	Prevents instrument application from saving/recall of measurement results or user configurations to/from instrument's data storage

Step 8. Add rear panel output utilities

Description	Option number	Additional information
Second IF output	Standard	Wideband IF out; center frequency depends on IF path; output on Aux IF connector at rear panel; licensed as N9040B-CR3
Arbitrary IF out	N9040B-CRP	IF out 10 to 75 MHz (in 500 kHz steps); output on Aux IF connector at rear panel
Aux log video out	N9040B-ALV	Fast rise time video out; output on Aux IF connector
Y-axis video out	N9040B-YAV	Screen video (0-1 volt open circuit); log video and linear video
Real time data link	Standard	The LVDS connector allows UXA connect to X-COM data recorder for data streaming (up to 40 MHz BW), and to the N5106A PXB baseband generator and channel emulator; licensed as N9040B-RTL

Step 9. Choose measurement application or software and license type

Note: Keysight offers 4 license types for the measurement applications and instrument features, in 2 license terms: Perpetual or Time-based. Keysight offers 4 license types for the measurement applications and instrument features, in 2 license terms: Perpetual or Time-based.

License types:

- **Node-locked:** Allows you to use the license on one instrument/computer at a time
- **Transportable:** Allows you to use the license on one instrument/computer at a time. This license may be transferred to another instrument/computer using Keysight's online tool
- **Floating:** Allows you to access the license on the networked instruments/computers from a server, one at a time. For concurrent access, multiple licenses may be purchased
- **USB Portable:** Allows you to access the license from one instrument/computer to another by end-user only with certified USB dongle, purchased separately

License terms:

- **Perpetual:** License can be used in perpetuity. For perpetual license holders, a separate support contract is required to access Keysight technical support and software updates
- **Time-based:** License is time limited to a defined period, such as 12-months. A valid support contract is included in the pricing for time-based licenses.

For detailed information, we strongly recommend you visit the X-Series measurement application collection page: www.keysight.com/find/xseriesapps

Description	Model number	Additional information
General purpose		
Spectrum analyzer	Standard	Traditional spectrum analysis plus many new and enhanced functions; power measurements based on industry specifications; licensed as N9060EM1E
Analog demodulation	N9063EM0E	Adds one-button measurement for AM/FM/PM demodulation with metrics, tune and listen, and AF spectrum; supports audio output (output voltage proportional to frequency deviation). FM Stereo and RDS are included.
Phase noise	N9068EM0E	Adds one-button measurements for analyzing phase noise in frequency domain (log plot) and time domain (spot frequency), supports external mixing
Noise figure	N9069EM0E (requires preamplifier)	Adds one-button measurements for noise figure, gain, and related metrics; requires preamplifier to meet specifications; works with Keysight U1831C USB noise source, N400xA Series smart noise sources and 346 Series noise sources; supports U7227 USB external preamplifiers Includes the advanced NF measurement features including external LO control over GPIB/LAN/USB, multi-stage converter tests with system LO, and manual mode to simulate the legacy NF meter
Vector modulation analysis Digital Demodulation	N9054EM0E	Performs one-button flexible modulation analysis measurements with FSK, PSK, QAM, MSK, ASK, APSK, VSB etc. and popular format preset
Vector modulation analysis Custom OFDM	N9054EM1E	Performs one-button custom OFDM modulation analysis measurement with user-defined settings or recalling 89600 VSA or Signal Studio output files
Pulse analysis	N9067EM0E	Characterize pulsed RF signals in the time domain, with phase, frequency and statistical analysis of large pulse sets; enables fixed and variable length gated acquisition for capturing pulses of varying pulse width and PRI (requires 4 GB capture memory Option DP4)
EMI	N6141EM0E	Performs pre-compliance conducted and radiated emission measurements
Remote language compatibility	N9061EM0E	Adds capability to emulate HP/Agilent 8566/68 and 856xE/EC spectrum analyzers
SCPI command language compatibility	N9062EM0E	Adds capability to emulate the R&S FSP/FSU/FSL/FSV/FSW spectrum analyzers or ESU EMI receiver
MATLAB software	N6171A	
89600 vector signal analysis (VSA) software	89601B (transportable license is standard)	Industry-leading measurement software for evaluating and troubleshooting signals in R&D; PC-based software supporting more than 30 measurement platforms, plus more than 75 signal standards and modulation types including MIMO analysis; www.keysight.com/find/89600_VSA

Cellular communications		
GSM/EDGE/Evo	N9071EM0E	Standard-based, one-button GSM/EDGE/EDGE Evolution measurements
W-CDMA/HSPA+	N9073EM0E	Standard-based, one-button W-CDMA, HSPA and HSPA+ measurements
LTE/LTE-Advanced FDD	N9080EM0E	Standard-based, one-button LTE/LTE-Advanced FDD measurements
NB-IoT & eMTC FDD	N9080EM3E	Standard-based, one-button NB-IoT/eMTC measurements
LTE/LTE-Advanced TDD	N9082EM0E	Standard-based, one-button LTE/LTE-Advanced TDD measurements
Multi-standard radio	N9083EM0E	Standard -based, one-button MSR measurements on any combination of LTE-FDD, W-CDMA/HSPA/HSPA+, and GSM/EDGE/EDGE Evo signals
5G NR (New Radio)	N9085EM0E (requires Option B2X, B5X or H1G)	Standard-based, one-button 5G NR (New Radio) downlink and uplink measurements

Wireless connectivity		
WLAN 802.11a/b/g/j/p/n/af/ah	N9077EM0E	Standard-based, one-button 802.11a/b/g/j/p/n/af/ah measurement
WLAN 802.11ac/ax	N9077EM1E	Standard-based, one-button 802.11ac/ax measurement
Bluetooth®	N9081EM0E	Standard-based, one-button Bluetooth (BR/EDR, Low Energy 4.0/4.2 and Bluetooth 5) measurements
Short Range Comm	N9084EM0E	Standard-based, one-button 802.15.4 for ZigBee measurement and G.9959 for Z-Wave measurement

Step 10. Choose accessories

Description	Option number	Additional information
User guide	Standard	<ul style="list-style-type: none"> – US – English localization – All user documentation is included in the embedded help system inside the UXa and on a DVD that is shipped with the instrument – User documentation can be downloaded from: www.keysight.com/find/uxa_manuals
Front-panel protective cover	Standard	
Rear-panel protective cover	Standard	
Power cord	Standard	Country specific
Mouse, USB interface	N9040B-MSE	Enhances usability of the VSA software
Compact keyboard, USB interface	N9040B-KB2	US 65 keys; Enhances the usability of the VSA software
USB DVD-ROM/CD-R/RW drive	N9040B-DVR	Enhances the usability of the Windows operating system
Rack mount kit	N9040B-1CM/2CM	Adds rack mount flanges and rails to the UXa (light gray/dark gray)
Rack mount kit with handles	N9040B-1CP /2CP	Adds rack mount flanges, rails and handles to the UXa (light gray/dark gray)
Minimum loss pad, 50 to 75 Ω (type-N to BNC)	N9040B-MLP	<ul style="list-style-type: none"> – 50 Ω type-N male to 75 Ω BNC female adapter – Frequency range: 9 MHz to 2 GHz – Input/output return loss: 20/11 dB – Insertion loss: 5.7 dB
V-band waveguide harmonic mixer, 50 to 75 GHz	M1970V-001	USB mixer with smart “plug-and-play” features
Extended V-band waveguide harmonic mixer, 50 to 80 GHz	M1970V-002	USB mixer with smart “plug-and-play” features
E-band waveguide harmonic mixer, 60 to 90 GHz	M1970E	USB mixer with smart “plug-and-play” features
W-band waveguide harmonic mixer, 75 to 110 GHz	M1970W	USB mixer with smart “plug-and-play” features
Wide IF bandwidth waveguide harmonic mixer		Capable of analyzing wide bandwidth (> 2 GHz) signals
E-band waveguide harmonic mixer, 60 to 90 GHz	M1971E-001	USB mixer with smart features and 3 signal paths
Extended E-band waveguide harmonic mixer, 55 to 90 GHz	M1971E-003	USB mixer with smart features and 3 signal paths
V-band waveguide harmonic mixer, 55 to 75 GHz	M1971V	USB mixer with smart features and 3 signal paths
W-band waveguide harmonic mixer, 75 to 110 GHz	M1971W	USB mixer with smart features and 3 signal paths

Step 10. Choose accessories (continued)

Description	Option number	Additional information
26 to 40 GHz (A-band) waveguide harmonic mixer	11970A	Requires N9029AE13 diplexer
33 to 50 GHz (Q-band) waveguide harmonic mixer	11970Q	Requires N9029AE13 diplexer
40 to 60 GHz (U-band) waveguide harmonic mixer	11970U	Requires N9029AE13 diplexer
50 to 75 GHz (V-band) waveguide harmonic mixer	11970V	Requires N9029AE13 diplexer
75 to 110 GHz (W-band) waveguide harmonic mixer	11970W	Requires N9029AE13 diplexer
LO/IF diplexer	N9029AE13	Ordering convenience; required for 11970 Series external mixers
90 to 140 GHz OML harmonic mixer	N9029AE08	Ordering convenience for OML mixer
110 to 170 GHz OML harmonic mixer	N9029AE06	Ordering convenience for OML mixer
140 to 220 GHz OML harmonic mixer	N9029AE05	Ordering convenience for OML mixer
220 to 350 GHz OML harmonic mixer	N9029AE03	Ordering convenience for OML mixer
50 to 75 GHz VDI frequency extender	N9029AV15	Signal analyzer frequency extension module from VDI
60 to 90 GHz VDI frequency extender	N9029AV12	Signal analyzer frequency extension module from VDI
75 to 110 GHz VDI frequency extender	N9029AV10	Signal analyzer frequency extension module from VDI
90 to 140 GHz VDI frequency extender	N9029AV08	Signal analyzer frequency extension module from VDI
110 to 170 GHz VDI frequency extender	N9029AV06	Signal analyzer frequency extension module from VDI
140 to 220 GHz VDI frequency extender	N9029AV05	Signal analyzer frequency extension module from VDI
220 to 330 GHz VDI frequency extender	N9029AV03	Signal analyzer frequency extension module from VDI
325 to 500 GHz VDI frequency extender	N9029AV02	Signal analyzer frequency extension module from VDI
500 to 750 GHz VDI frequency extender	N9029AV1B	Signal analyzer frequency extension module from VDI
750 to 1100 GHz VDI frequency extender	N9029AV01	Signal analyzer frequency extension module from VDI
Power supply for VDI module	N/A	Comes with N9029AVxx VDI module as standard
USB external preamplifier, 10 MHz to 4 GHz	U7227A	External preamplifier with smart "plug-and-play" features
USB external preamplifier, 0.1 to 26.5 GHz	U7227C	External preamplifier with smart "plug-and-play" features
USB external preamplifier, 2 to 50 GHz	U7227F	External preamplifier with smart "plug-and-play" features

For more information on the USB smart harmonic external mixers, go to www.keysight.com/find/smartmixer

For more information on the USB external preamplifiers, go to www.keysight.com/find/usb-preamp

Step 11. Add a calibration plan

Description	Option number	Additional information
Commercial calibration certificate with test data	N9040B-UK6	Calibration certificate only available at time of instrument purchase; only provides measurement results
Keysight Calibration + Uncertainties + Guardbanding (accredited cal)	N9040B-AMG	Provides ISO 17025A accredited calibration from factory (excessive delivery lead-time allowed)
ANSI Z540-1-1994 Calibration	N9040B-A6J	Provides ANSI Z540 compliant calibration from factory (excessive delivery lead-time allowed)

Other calibration options may be available; for more information on calibration go to:

www.keysight.com/find/calibration

For more information on training and application support services go to:

www.keysight.com/find/training

Instrument Upgrades

Fast license-key upgrades for options that do not require additional hardware:

1. Place an order for the upgrade with Keysight and request to receive the option upgrade entitlement certificate and a one-time software upgrade license through email
2. Redeem the certificate through the Web by following the instructions on the certificate
3. Install the license file and latest software in the UXA
4. Begin using the new capability ^{1,2}

Installation, calibration, and verification information is available at:

www.keysight.com/find/uxa_upgrades

Upgrades to wider analysis bandwidths (> 40 MHz) require hardware and license key. Instruments are required to ship back to Keysight regional service center for upgrade and calibrations.

A web-based calculator at the following URL assists you in finding what upgrade options for analysis bandwidth you need: www.keysight.com/find/BW-selector

1. At the time of manufacture, the hardware related to many of these options was fully adjusted and the option performance was verified to be within its warranted specifications. Within one year of the initial calibration date of the analyzer, this option is fully calibrated with no further adjustment or verification testing.
2. If this analyzer has been adjusted as part of a repair or calibration during its first year, or if the analyzer is more than one year old, additional adjustment and performance verification tests are required to ensure that some newly installed options are functioning properly. However, the completion of these tests does not guarantee that the analyzer meets all warranted specifications.

You Can Upgrade!

Options can be added after your initial purchase.

Most X-Series options are license-key upgradeable.



Description	Upgrade number	Requirements (UXA must already include the following)	Additional information
Increase frequency from 8.4 to 13.6 GHz	N9040BU-F06	508	
Increase frequency from 8.4 to 26.5 GHz	N9040BU-F07	508	
Increase frequency from 13.6 to 26.5 GHz	N9040BU-F10	513	
Increase frequency from 44 to 50 GHz	N9040BU-F15	544	Includes 50 GHz preamp
Increase analysis bandwidth from 10 to 25 MHz	N9040BU-B25	None	License key only
Increase analysis bandwidth from 10 or 25 MHz to 40 MHz	N9040BU-B40	None	License key only
Increase analysis bandwidth from 10, 25 or 40 MHz to 255 MHz on microwave and millimeterwave instruments	N9040BU-B2X	None	Includes additional hardware; return to Keysight service center
Increase analysis bandwidth from 10, 25 or 40 MHz to 510 MHz on microwave instruments	N9040BU-B5X	508, 513, or 526	Includes additional hardware; return to Keysight service center; for instruments with frequency range \leq 26.5 GHz
Increase analysis bandwidth from 10, 25 or 40 MHz to 510 MHz on millimeterwave instruments	N9040BU-BUG	544 or 550	Includes additional hardware; return to Keysight service center; for instruments with frequency range \geq 44 GHz
Increase analysis bandwidth from 10, 25 or 40 MHz to 1 GHz on millimeterwave instruments	N9040BU-H1G	550	Includes additional hardware; return to Keysight service center; full bypass path (FBP) is included; not compatible with Option B2X, B5X, or 508, 513, 526, 544, or DUA.
Increase analysis bandwidth from 255 MHz to 510 MHz on microwave instruments	N9040BU-BUF	B2X and 508, 513, or 526	Includes additional hardware; return to Keysight service center; for instruments with frequency range \leq 26.5 GHz
Increase analysis bandwidth from 255 MHz to 510 MHz on millimeterwave instruments	N9040BU-BUM	B2X and 544 or 550	Includes additional hardware; return to Keysight service center; for instruments with frequency range \geq 44 GHz
Increase analysis bandwidth from 255 MHz to 1 GHz on millimeterwave instruments	N9040BU-BUU	550 and B2X	Includes additional hardware; return to Keysight service center; full bypass path (FBP) is included; not compatible with Option B5X, or 508, 513, 526, 544, or DUA
Digital processor with 4 GB capture memory for instruments with serial number prefixes < MY/SG/US5608	N9040BU-DP4	B2X or H1G	Includes hardware and license key; not compatible with Option B5X
Digital processor with 4 GB capture memory for instruments with serial number prefixes < MY/SG/US5608	N9040BU-DP5	B5X	Includes hardware and license key
Add full bypass path for instruments with serial number prefixes \geq MY/SG/US5605 and < MY/SG/US57212054	N9040BU-FBP	550 and H1G	Return to Keysight service center; compatible with frequency range option N9040B-550 only
Real-time analysis, basic detection	N9040BU-RT1	B2X, H1G (255 MHz max real-time BW), or B5X (510 MHz max real-time BW)	License key only; includes FMT, TQT; minimum 17.3 μ s signal duration for 100% POI with full amplitude accuracy. Also orderable at N9040RT1B (requires F/W revision A.21.04 onward)
Real-time analysis, optimum detection	N9040BU-RT2	B2X, H1G (255 MHz max real-time BW), or B5X (510 MHz max real-time BW)	License key only; includes FMT, TQT; minimum 3.517 μ s signal duration for 100% POI with full amplitude accuracy. Also orderable at N9040RT2B (requires F/W revision A.21.04 onward)
Real-time I/Q data streaming	N9040BU-RTS	RT1 or RT2	Includes additional hardware, return to Keysight service center
Real-time spectrum recorder and analyzer application	N9040BU-RTR	RT1 or RT2	Enables recording, analyzing and playback of spectrum density data over time for detecting and analyzing signal anomalies.

Description	Upgrade number	Requirements (UXA must already include the following)	Additional information
Duplex IF RTSA	N9040BU-DUA	B5X and RT1 or RT2	License key only. Also orderable at N90EMDUAB (requires F/W revision A.21.04 onward)
Frequency mask trigger, basic detection	N9040BU-FT1	B2X, B5X, or H1G	License key only. Also orderable at N90EMFT1B (requires F/W revision A.21.04 onward)
Frequency mask trigger, optimum detection	N9040BU-FT2	B2X, B5X, or H1G	License key only. Also orderable at N90EMFT2B (requires F/W revision A.21.04 onward)
Add electronic attenuator to 3.6 GHz	N9040BU-EA3	None	License key only; 1-dB steps, 0 to 24 dB range
Add preamplifier, 8.4 GHz	N9040BU-P08	508, 513, 526, 544 or 550	License key only
Add preamplifier, 13.6 GHz	N9040BU-P13	513, 526, 544 or 550	License key only
Add preamplifier, 26.5 GHz	N9040BU-P26	526, 544 or 550	License key only
Add preamplifier, 44 GHz	N9040BU-P44	544	License key only
Add preamplifier, 50 GHz	N9040BU-P50	550	License key only
Add auxiliary log video out	N9040BU-ALV	None	License key only
Add arbitrary IF output	N9040BU-CRP	None	License key only
Add Y-axis video output	N9040BU-YAV	None	License key only
Add fast power	N9040BU-FP2	B40 or wider BW	License key only; for fast power measurements such as ACPR. Also orderable at N90EMFP2B (requires F/W revision A.21.04 onward)
Add precompliance EMI features	N9040BU-EMC	None	License key only. Also orderable at N90EMEMCB (requires F/W revision A.21.04 onward)
Add external source control	N9040BU-ESC	None	Adds feature to control the Keysight EXG, MXG, and PSG signal generators for scalar stimulus/response measurements; ships with 3 BNC cables and 1 crossover LAN cable. Also orderable at N90EMESCB (requires F/W revision A.21.04 onward)
Add time domain scan capability	N9040BU-TDS	N6141C	For EMC pre-compliance tests only. Also orderable at N90EMEMCB (requires F/W revision A.21.04 onward)
Add resolution bandwidth extended	N9040BU-RBE	B2X, B5X, or H1G	License key only. Also orderable at N90EMRBEB (requires F/W revision A.21.04 onward)
Add security features, exclude launch programs	N9040BU-SF1	None	License key only; prevents the launching of Windows programs from the instrument application
Add security features, prohibit saving results	N9040BU-SF2	None	License key only; prevents instrument application from saving/recall of measurement results or user configurations to/from instrument's data storage
USB DVD-ROM/CD-R/RW drive	N9040BU-DVR	None	
65-key USB keyboard	N9040BU-KB2	None	
USB mouse	N9040BU-MSE	None	
Minimum loss pad, 50 to 75 Ω (type-N to BNC)	N9040BU-MLP	None	50 Ω type-N male to 75 Ω BNC female adapter; frequency range: 9 MHz to 2 GHz; input/output return loss: 20/11 dB; insertion loss: 5.7 dB; includes additional hardware
Additional removable solid-state drive (SSD)	N9040BU-SS1	None	Spare SSD for security environment or for a backup, with Windows 10 operating system
Upgrade operating system to Windows 10	N9040BU-SS1	PC6, W7X	Provides a removable solid-state drive with Windows 10 operating system

Description	Upgrade number	Requirements (UXA must already include the following)	Additional information
Korean version of Getting Started Guide	N9040BU-AB1	None	
Chinese version of Getting Started Guide	N9040BU-AB2	None	
Spanish version of Getting Started Guide	N9040BU-ABE	None	
French version of Getting Started Guide	N9040BU-ABF	None	
Japanese version of Getting Started Guide	N9040BU-ABJ	None	
Russian version of Getting Started Guide	N9040BU-AKT	None	

Note: It is recommended to order measurement applications with the model numbers listed at Step 9. Alternatively, you can use the ordering numbers in this table to add the measurement applications. The last two letters of the ordering numbers indicate the license type—FP stands for fixed perpetual, TP for transportable perpetual; it is recommended that you configure each application with the same license type; Visit www.Keysight.com/find/X-Series_transportable for more information about transportable licenses.

Description	Fixed license	Transportable license	Additional information
General purpose			
Analog demodulation	N9063C-1FP	N9063C-1TP	Licensed as N9063C-2FP or -2TP and N9063C-3FP or -3TP. Adds one-button measurement for AM/FM/PM demodulation with metrics, tune and listen, and AF spectrum; supports audio output (output voltage proportional to frequency deviation). FM Stereo and RDS are included.
Noise figure	N9069C-3FP (requires preamplifier)	N9069C-3TP (requires preamplifier)	Licensed as N9069C-1FP or -1TP and N9069C-2FP or -2TP. Adds one-button measurements for noise figure, gain, and related metrics; requires preamplifier to meet specifications; works with Keysight N400xA Series smart noise sources and 346 Series noise sources; supports U7227 Series USB external preamplifiers. Includes the advanced NF measurement features including external LO control over GPIB/LAN/USB, multi-stage converter tests with system LO, and manual mode to simulate the legacy NF meter.
Phase noise	N9068C-2FP	N9068C-2TP	Adds one-button measurements for analyzing phase noise in frequency domain (log plot) and time domain (spot frequency); supports external mixing.
Vector modulation analysis	N9054C-1FP	N9054C-1TP	One-button vector modulation analysis measurements.
EMI	N6141C-2FP	N6141C-2TP	Pre-compliance conducted and radiated emission measurements.
Remote language analyzers	N9061C-1FP	–	Add capability to emulate HP/Agilent 8566/68 and 856xE/EC spectrum analyzers; licensed as N9061C-1FP and N9061C-2FP.
SCPI command language compatibility	N9062C-2FP	Not available	Adds capability to emulate the R&S FSP/FSU/FSE spectrum analyzers or ESU EMI receiver.
Pulse	N9067C-1FP	N9067C-1TP	Characterize pulsed RF signals in the time domain, with phase, frequency and statistical analysis of large pulse sets.
	N9067C-2FP	N9067C-2TP	Enables fixed and variable length gated acquisition for capturing pulses of varying pulse width and PRI; requires 4 GB capture memory Option DP4.
Wireless connectivity			
WLAN 802.11a/b/g/j/p/n/ac/af/ah/ax	N9077C-1FP	N9077C-1TP	Licensed as N9077C-2FP or -2TP and N9077C-3FP or -3TP; standard-based, one-button 802.11a/b/g/j/p/n measurement.
	N9077C-4FP	N9077C-4TP	Adds 802.11ac; requires N9077C-1FP/1TP (licensed as N9077C-2FP/2TP and 3FP/3TP).
	N9077C-6FP	N9077C-6TP	Standard-based, one-button 802.11ah measurement.
	N9077C-7FP	N9077C-7TP	Standard-based, one-button 802.11af measurement.
	N9077C-8FP	N9077C-8TP	Standard-based, one-button 802.11ax single user PPDU measurement.
	N9077C-MFP	N9077C-MTP	Standard-based, one-button 802.11ax multi-user PPDU measurement.

Description	Fixed license	Transportable license	Additional information
General purpose			
<i>Bluetooth®</i>	N9081C-2FP	N9081C-2TP	Standard-based, one-button <i>Bluetooth</i> version 2.1+ EDR and Low Energy (BR/EDR/LE 4.0/4.2) measurements
	N9081C-3FP	N9081C-3TP	Standard-based, one-button <i>Bluetooth</i> version 5.0 measurement; requires N9081C-2FP/2TP
Short range communications	N9084C-1FP	N9084C-1TP	Standard-based, one-button 802.15.4 for ZigBee measurement
	N9084C-2FP	N9084C-2TP	Standard-based, one-button G.9959 for Z-Wave measurement
Cellular communications			
LTE/LTE-Advanced FDD	N9080C-1FP	N9080C-1TP	Standard-based, one-button LTE-FDD measurements
	N9080C-2FP	N9080C-2TP	Standard-based, one-button LTE-Advanced FDD measurements; requires N9080C-1FP/1TP
NB-IoT/eMTC	N9080C-3FP	N9080C-3TP	Standard-based, one-button NB-IoT/eMTC measurements
LTE/LTE-Advanced TDD	N9082C-1FP	N9082C-1TP	Standard-based, one-button LTE-TDD measurements
	N9082C-2FP	N9082C-2TP	Standard-based, one-button LTE-Advanced TDD measurements; requires N9082C-1FP/1TP
GSM/EDGE/EVO	N9071C-1FP	N9071C-1TP	Licensed as N9071C-2FP or -2TP and N9071C-3FP or -3TP. Standard-based, one-button GSM/EDGE/EDGE Evolution measurements
W-CDMA/HSPA+	N9073C-1FP	N9073C-1TP	Standard-based, one-button W-CDMA measurements
	N9073C-2FP	N9073C-2TP	Adds HSPA measurements; requires 1FP/1TP
	N9073C-3FP	N9073C-3TP	Adds HSPA+ measurements; requires 1FP/1TP, 2FP/2TP
Other			
89600 VSA software	Not available	89601B (transportable license is standard)	Industry-leading measurement software for evaluating and troubleshooting signals in R&D; PC-based software supporting more than 30 measurement platforms, plus more than 75 signal standards and modulation types including pulse analysis; www.keysight.com/find/89600_VSA

Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

